

Gru a bandiera a colonna

Column mounted jib cranes

TIPO C
con braccio in profilato a canalina

C TYPE
with channel profile arm

CARATTERISTICHE SPECIFICATION

The arm, manufactured with a special press-formed channel profile, stable and light, ensures the best swinging sensitivity and sliding of the trolley. The rigid structure of the column ensures the stability of the trolley during all lifting stages.

Available with manual push trolley.

All cranes are supplied complete with power supply line and junction box.

- Arms length from 2 to 8 m.
- Rotation 270°.
- Capacity from 125 to 1,000 kg.

Il braccio, realizzato in uno speciale profilo pressopiegato a canalina, stabile e leggero, garantisce la migliore sensibilità di brandeggio e di scorrevolezza del carrello.

La struttura rigida della colonna assicura la stabilità del carrello durante tutte le fasi del sollevamento.

Disponibile con carrello manuale a spinta.

Tutte le gru vengono fornite complete di linea di alimentazione e cassetta di derivazione.

- Sbracci da 2 a 8 m.
- Rotazione 270°.
- Portate da 125 a 1000 kg.




DATI TECNICI

TECHNICAL DATA

Portata Capacity	Sbraccio Arm length	Gru tipo Crane type	Paranco Kito tipo Kito hoist type	Dimensioni Dimensions						Piastra base per tasselli* Base plate for chemical anchors*		Piastra base per tirafondi* Base plate for long bolts*		P daN	M daNxm
				H mm	H1 mm	B mm	C mm	D mm	E mm	Dim. Dim.	N° N°	Dim. Dim.	N° N°		
125	2	C 12/2	KQ1S-SD	3000	2450	2000	395	385	130	440 x 440	8 x M16	440 x 440	8 x M16	500	620
125	3	C 12/3	KQ1S-SD	3000	2450	3000	395	485	130	440 x 440	8 x M16	440 x 440	8 x M16	520	870
125	4	C 12/4	KQ1S-SD	3000	2450	4000	395	535	130	540 x 540	8 x M16	540 x 540	8 x M20	550	1150
125	5	C 12/5	KQ1S-SD	3500	2950	5000	395	595	130	540 x 540	8 x M16	540 x 540	8 x M20	610	1430
125	6	C 12/6	KQ1S-SD	3500	2750	6000	395	665	130	540 x 540	8 x M16	540 x 540	8 x M20	700	1720
125	7	C 12/7	KQ1S-SD	3500	2650	7000	395	725	130	700 x 700	12 x M16	700 x 700	8 x M24	790	2000
125	8	C 12/8	KQ1S-SD	4000	3150	8000	395	840	130	700 x 700	12 x M16	700 x 700	8 x M24	920	2400
250	2	C 25/2	KQ3S-SD	3000	2450	2000	395	385	130	540 x 540	8 x M16	540 x 540	8 x M20	690	1000
250	3	C 25/3	KQ3S-SD	3000	2450	3000	395	485	130	540 x 540	8 x M16	540 x 540	8 x M20	720	1470
250	4	C 25/4	KQ3S-SD	3000	2450	4000	395	575	130	540 x 540	8 x M16	540 x 540	8 x M20	770	1960
250	5	C 25/5	KQ3S-SD	3500	2750	5000	395	635	130	700 x 700	12 x M16	700 x 700	8 x M24	880	2440
250	6	C 25/6	KQ3S-SD	3500	2750	6000	395	665	130	700 x 700	12 x M16	700 x 700	8 x M24	960	2910
250	7	C 25/7	KQ3S-SD	3500	2650	7000	395	770	160	800 x 800	16 x M16	700 x 700	8 x M24	1040	3400
250	8	C 25/8	KQ3S-SD	4000	3050	8000	395	840	160	800 x 800	16 x M16	800 x 800	8 x M27	1170	3880
500	2	C 50/2	KQ5S-SD	3500	2950	2000	410	385	160	540 x 540	8 x M16	540 x 540	8 x M20	1130	1840
500	3	C 50/3	KQ5S-SD	3500	2750	3000	410	570	160	700 x 700	12 x M16	700 x 700	8 x M24	1210	2700
500	4	C 50/4	KQ5S-SD	3500	2750	4000	410	640	160	700 x 700	12 x M16	700 x 700	8 x M24	1260	3580
500	5	C 50/5	KQ5S-SD	3500	2750	5000	410	640	160	800 x 800	16 x M16	800 x 800	8 x M27	1390	4460
500	6	C 50/6	KQ5S-SD	4000	3150	6000	410	740	160	800 x 800	16 x M16	800 x 800	8 x M27	1510	5330
500	7	C 50/7	KQ5S-SD	4000	3050	7000	410	770	160	800 x 800	16 x M16	800 x 800	8 x M27	1690	6240
500	8	C 50/8	KQ5S-SD	4000	3050	8000	410	800	160	1000 x 1000	20 x M16	900 x 900	12 x M27	1720	7100
1000	2	C 100/2	KQ10S-SD	3500	2750	2000	465	640	310	800 x 800	16 x M16	700 x 700	8 x M24	2150	3590
1000	3	C 100/3	KQ10S-SD	3500	2650	3000	465	660	310	800 x 800	16 x M16	800 x 800	8 x M27	2190	5250
1000	4	C 100/4	KQ10S-SD	4000	3150	4000	465	740	310	800 x 800	16 x M16	800 x 800	8 x M27	2270	6900
1000	5	C 100/5	KQ10S-SD	4000	3050	5000	465	790	310	1000 x 1000	20 x M16	800 x 800	8 x M27	2460	8640
1000	6	C 100/6	KQ10S-SD	4000	3050	6000	465	860	310	1000 x 1000	20 x M16	900 x 900	12 x M27	2550	10300
1000	7	C 100/7	KQ10S-SD	4000	3050	7000	465	920	310	1000 x 1000	20 x M20	900 x 900	12 x M27	2740	12040
1000	8	C 100/8	KQ10S-SD	4000	2950	8000	465	960	310	1000 x 1000	20 x M20	1100 x 1100	12 x M27	2840	13690

* Fino ad altezza colonna 5000 mm.
Up to column height 5000 mm.

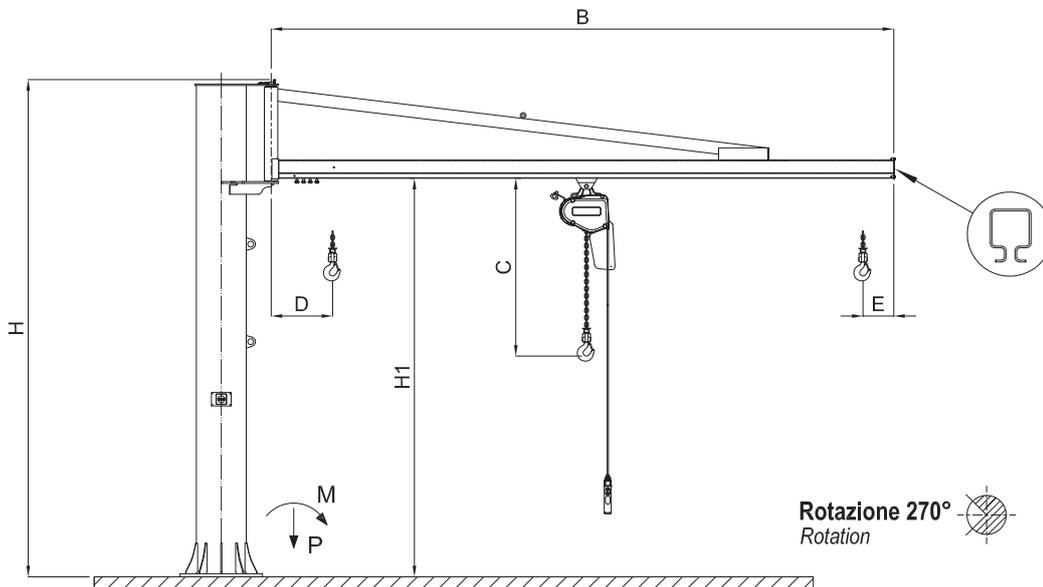

GRU A BANDIERA
JIB CRANES