GRILLI Green Pin® WEB SLING SC PER BRACHE DI POLIESTERE

Green Pin® WEB SLING SHACKLE SC

CARATTERISTICHE
SPECIFICATIONS

The Green Pin Web Sling Shackle SC is the ideal shackle for lifting with synthetic round slings and flat web slings. The optimal bearing surface of the shackle crown means the load on the web sling is distributed evenly. As a result, damage to the web sling is minimized and its lifespan extended.
Wear of the web sling is also minimized as a result of the smooth finish of the shackle. Furthermore, because the load is distributed evenly on the web sling compared to a standard shackle, it is not necessary to reduce the load (WLL) on the web sling. The risk of damage to the web sling that touches the pin is also significantly reduced because the screw thread is completely hidden into the shackle eye. The product is suitable for webs slings made according to EU and US standards.

Il grillo Green Pin Web Sling SC è stato disegnato appositamente per il sollevamento mediante imbragature di poliestere piatte o ad anello continuo. La superficie di appoggio ottimale della staffa del grillo consente di distribuire il carico sull'imbracatura in modo uniforme. Di conseguenza, il danneggiamento dell'imbragatura di poliestere è ridotto al minimo e la sua durata è estesa.
L'usura dell'imbragatura è ridotta al minimo anche grazie alla finitura liscia del grillo. Inoltre, non è necessario ridurre il carico di lavoro della braca poiché il carico è distribuito uniformemente. Anche il rischio di danneggiare la braca a contatto con il perno si riduce in modo significativo perché la filettatura è completamente nascosta nella staffa del grillo. Il prodotto è adatto per imbragature realizzate secondo gli standard UE e USA.

Codice Code	Portata WLL	Dimensioni Dimensions										Peso Weight
P 5461	**t**	**a mm**	**b mm**	**c mm**	**d mm**	**e mm**	**f mm**	**g mm**	**h mm**	**i mm**	**j mm**	**Kg**
AGRLVFWS03,2	3,25	20	19	40	16	27	38	35	87	89	68	0,66
AGRLVFWS04,7	4,75	24	22	46	19	31	48	46	106	103	85	1,1
AGRLVFWS06,5	6,5	27	25	52	22	36	72	62	137	119	108,5	1,79
AGRLVFWS08,5	8,5	31	28	59	25	43	84	79	158	137	134	2,74

- Coefficiente di sicurezza 6.
- Temperatura di lavoro: -40°C ÷ 200°C.
- Safety factor 6.
- Temperature range: -40°C ÷ 200°C.

Tipo P 5461
Con perno filettato
Acciaio alta resistenza G8
Finitura: verniciati verdi
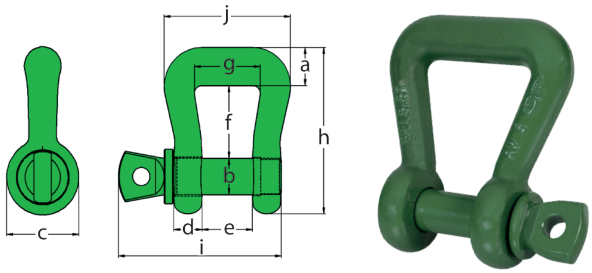
P 5461 type
With screw pin
Gr 8 high tensile steel
Finish: green painted