Tipo BKW per il trasporto di travi metalliche in posizione orizzontale

BKW type for transportation of steel beams in horizontal position

- Suitable for transportation of steel beams.
- Cam Safety lock in open position to make the introduction of the beam easier and in closed position to firmly grip the beam even in no-pulling force condition.
- Increased safety due to action of the special alloy cam concentrated against a circular pivot.
- Safety factor min. 5 x rated load capacity.
- **Min. WLL is 10% of the maximum WLL.**

- Idonee per il trasporto di travi metalliche.
- Dispositivo di blocco della camma in posizione aperta per facilitare l'introduzione della trave nella morsa e in posizione chiusa per serrare fermamente la trave anche quando la morsa non è in tensione.
- Camma di materiale speciale che agendo contro un puntale concentra la forza serrante della morsa aumentando la sicurezza di presa.
- Coefficiente sicurezza 5 volte minimo la portata nominale.
- **Non sollevare mai un carico di peso inferiore al 10% della portata nominale della morsa.**
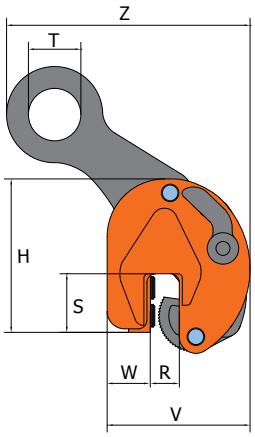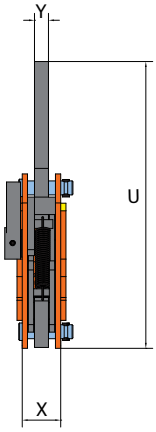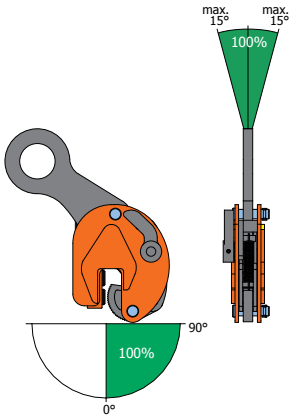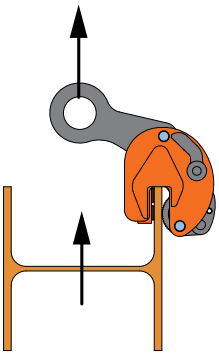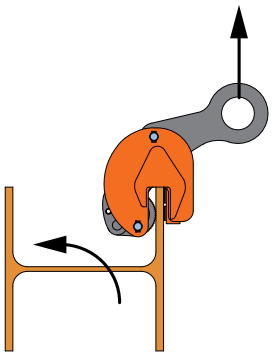
Tipo Type	Portata WLL	Luce di presa Jaw opening	Dimensioni Dimensions									Peso Weight
	kg	R mm	V mm	W mm	S mm	H mm	T mm	Z mm	X mm	U mm	Y mm	Kg
BKW 1 t	1.000	0-15	136	43	45	154	35	200	47	225	15	3
BKW 1,5 t	1.500	0-20	170	56	67	210	60	312	56	374	16	7
BKW 3 t	3.000	0-25	208	58	66	252	70	380	77	410	20	15