


Anima metallica tipo M4M-GNOC

M4M-GNOC type steel core

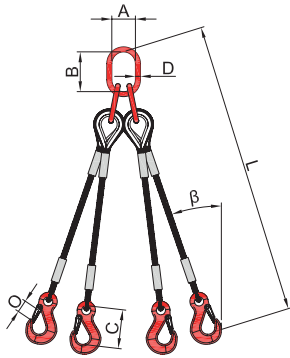

Fune zincata
tipo AZN 719 - AZN 636 AC
Galvanized wire rope
type AZN 719 - AZN 636 AC

Codice Code	Fune Rope Ø mm	Portata WLL		Campanella Master link		Gancio Hook	
		β 0°-45° Kg	β 45°-60° Kg	Tipo Type	AxBxD mm	Tipo Type	CxO mm
TCM4GN03	3	243	174	WT7	75x135x19	GNOC0,8	82 x 20
TCM4GN04	4	427	305	WT7	75x135x19	GNOC0,8	82 x 20
TCM4GN05	5	718	513	WT7	75x135x19	GNOC0,8	82 x 20
TCM4GN06	6	1.057	755	WT7	75x135x19	GNOC0,8	82 x 20
TCM4GN08	8	1.728	1.234	WT7	75x135x19	GNOC0,8	82 x 20
TCM4GN10	10	2.685	1.918	WT8	90x160x23	GNOC1,6	105 x 23
TCM4GN12	12	4.102	2.930	MT5,5	95x160x23	GNOC2	121 x 27
TCM4GN14	14	5.590	3.993	MT5,5	95x160x23	GNOC3,2	147 x 35
TCM4GN16	16	7.302	5.216	MT9,4	110x190x27	GNOC3,2	147 x 35
TCM4GN18	18	9.233	6.595	MT9,4	110x190x27	GNOC5	187 x 43
TCM4GN20	20	11.411	8.151	MT14	130x230x33	GNOC5	187 x 43
TCM4GN22	22	13.809	9.864	MT14	130x230x33	GOA8	187 x 43
TCM4GN24	24	16.435	11.739	MT22	150x275x38	GOA8	187 x 43
TCM4GN26	26	19.280	13.771	MT22	150x275x38	GOA11,5	230 x 53
TCM4GN28	28	22.332	15.951	MT22	150x275x38	GOA11,5	230 x 53
TCM4GN30	30	25.628	18.306	MT33	180x340x45	GOA16	255 x 58
TCM4GN32	32	29.163	20.831	MT33	180x340x45	GOA16	255 x 58
TCM4GN34	34	32.906	23.504	MT33	180x340x45	GOA16	255 x 58
TCM4GN36	36	36.852	26.323	VAW19	190x350x50	GOA22	318 x 80
TCM4GN38	38	41.081	29.344	VAW19	190x350x50	GOA22	318 x 80
TCM4GN40	40	45.514	32.510	VAW22	190x350x50	GOA22	318 x 80

- Tolleranze in accordo alle norme EN vigenti.
- La lunghezza minima L è circa 55 volte il diametro della fune.
- Tolerances according to EN standards.
- Minimum length L: 55 times the wire rope diameter